


RAM® Gas Tank Mount Assembly Guide

Included Hardware:

- A. RAM Gas Tank Bracket (QTY. 1)
- B. RAM Ball Adapter with Hex Pad (QTY. 1)
- C. #10-24 x 1 1/2" Machine Screw (QTY. 1)
- D. #10-24 Nylock Nut (QTY. 1)
- E. #10 x 1" Fender Washer (QTY. 1)
- F. M5-0.8 x 40mm Socket Head Cap Screw (QTY. 4)
- G. M5-0.8 x 25mm Socket Head Cap Screw (QTY. 3)
- H. M5 Flat Washer (QTY. 4)

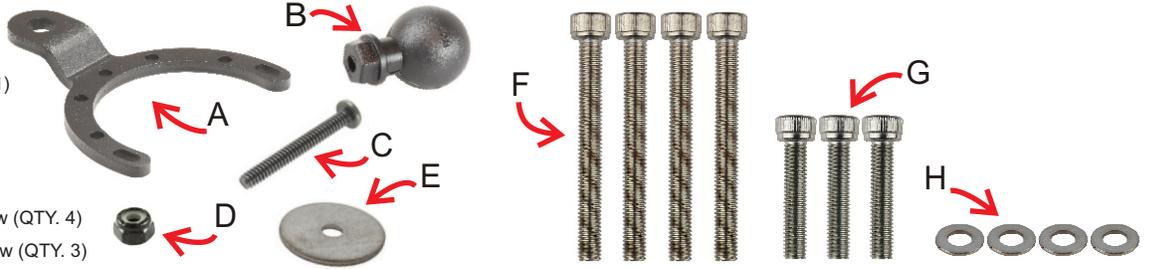

Sort and verify all hardware and components prior to installation.

Assemble (B) RAM Ball to (A) Gas Tank Bracket as shown:



Place the gas tank base on your traditional gas cap to determine the correct alignment with the bolts, and desired position of the RAM Ball. **Important: Bolt alignment must be symmetrical.**

Use any combination of the provided hardware to replace the factory screws on your gas cap when installing. It is important to note that **each** of the screws on your gas cap may have different lengths. For every factory screw you replace, the replacement screw should be approximately **12mm** longer. Place provided washers under cap screw heads when installing.

RAM Mounting Systems
 8410 Dallas Ave S
 Seattle, WA 98108
 Phone: (206) 763-8361
 Fax: (206) 763-9615
 www.rammount.com
 support@rammount.com

Some bikes may require unique hardware to properly install this base. Depending on your configuration, 3rd party hardware may be required.

Common Hardware for Bike Models:

For Kawasaki:
 (G) 25mm Screws - Qty. 3

For BMW:
 (F) 40mm Screws - Qty. 4



RAM MOUNTS®


RMR-INS-411

This document, including images, may not be reproduced partly or fully without the expressed written consent of National Products, Inc.

RAM® Gas Tank Mount Assembly Guide


Included Hardware:

- A. RAM Gas Tank Bracket (QTY. 1)
- B. RAM Ball Adapter with Hex Pad (QTY. 1)
- C. #10-24 x 1 1/2" Machine Screw (QTY. 1)
- D. #10-24 Nylock Nut (QTY. 1)
- E. #10 x 1" Fender Washer (QTY. 1)
- F. M5-0.8 x 40mm Socket Head Cap Screw (QTY. 4)
- G. M5-0.8 x 25mm Socket Head Cap Screw (QTY. 3)
- H. M5 Flat Washer (QTY. 4)

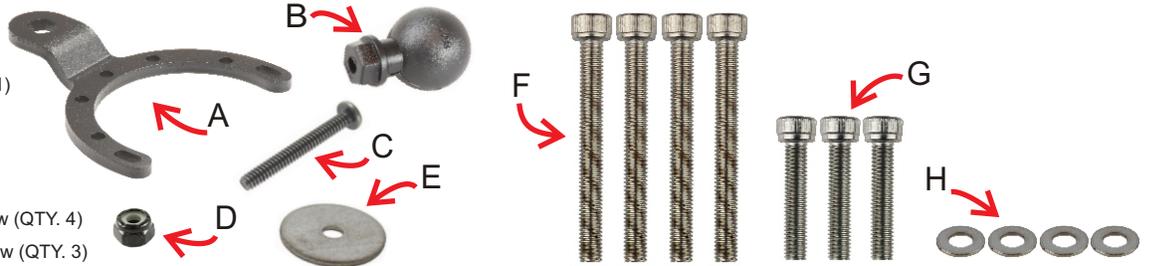

Sort and verify all hardware and components prior to installation.

Assemble (B) RAM Ball to (A) Gas Tank Bracket as shown:

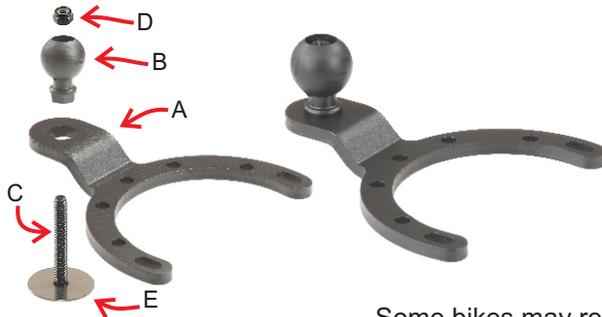

Place the gas tank base on your traditional gas cap to determine the correct alignment with the bolts, and desired position of the RAM Ball. **Important: Bolt alignment must be symmetrical.**

Use any combination of the provided hardware to replace the factory screws on your gas cap when installing. It is important to note that **each** of the screws on your gas cap may have different lengths. For every factory screw you replace, the replacement screw should be approximately **12mm** longer. Place provided washers under cap screw heads when installing.

RAM Mounting Systems
 8410 Dallas Ave S
 Seattle, WA 98108
 Phone: (206) 763-8361
 Fax: (206) 763-9615
 www.rammount.com
 support@rammount.com

Some bikes may require unique hardware to properly install this base. Depending on your configuration, 3rd party hardware may be required.

Common Hardware for Bike Models:

For Kawasaki:
 (G) 25mm Screws - Qty. 3

For BMW:
 (F) 40mm Screws - Qty. 4



RAM MOUNTS®

RMR-INS-411

This document, including images, may not be reproduced partly or fully without the expressed written consent of National Products, Inc.