


This Quick Guide is not a substitute to the user manual and addresses only a limited scope of features and functions of your **scala rider G9**. Use it to look up basic functions and commands while you are on the road without the user manual.

This Quick Guide can be printed and folded for easy reference while on the road, or it may be viewed directly on your smartphone or tablet.

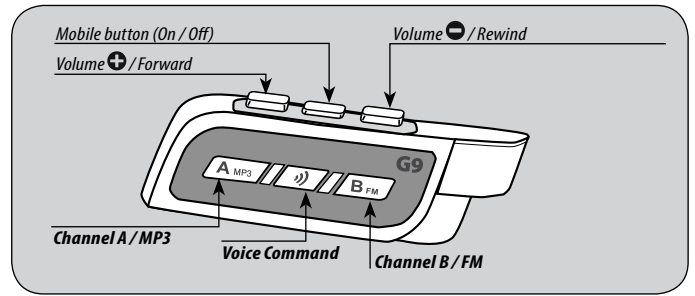

1 GENERAL FUNCTIONS	
Power ON / OFF	Press [Power] for 2 seconds <ul style="list-style-type: none"> • ON: 3 BLUE flashes + ascending tone • OFF: 3 RED flashes + descending tone
Volume	Tap [+] or [-] to adjust and set volume of current audio source
Mute	Tap [+] and [-] simultaneously
Battery level indicator	In Standby, press [+] for 2 seconds <ul style="list-style-type: none"> • Blue LED = Full charge • Purple LED = Half charge • Red LED = Almost empty
Hear Your Buddy Name	In Standby, tap [Voice] and [B] simultaneously
Paired Device Indication	In Standby, press [Voice] and [B] for 2 seconds If "One+8" Buddies are within range, purple LEDs flash for 2 seconds
Group Signal	Tap [Voice] twice
Enable / Disable Spoken Status Announcements	Press [Power] and [Voice] for 2 seconds

2 SETTINGS MENU	
Enter Menu	In Standby, press [A] and [B] for 2 seconds
Exit Menu	Press [B] for 2 seconds

3 MAIN UNIT LED INDICATION	
None	scala rider G9 is OFF
1 BLUE flash every 3 seconds	Standby mode – No active audio
2 BLUE flashes every 3 seconds	Active mode – Call in progress / music or other audio source is ON
1 RED flash every 3 seconds	Standby mode – Battery is low
2 RED flashes every 3 seconds	Active mode – Battery is low
Solid RED	Charging

4 VOICE CONNECT (VOX)	
VOX Sensitivity (Default: Medium)	Adjust via the Settings Menu, the App or the <i>Cardo Community</i> . High: Use this setting if it is difficult to activate VOX Low: Use this setting if it is too easy to activate VOX
VOX Operation Mode	VOX can be set to activate the Voice Command (default) or to start an Intercom Call via the <i>Cardo Community</i> or the App
Enable / Disable VOX (For Intercom calls only)	In Standby, press [+] and [-] for 2 seconds <ul style="list-style-type: none"> • Enabled: Blue flash for 2 seconds • Disabled: Red flash for 2 seconds

5 VOICE COMMANDS		
1. In Standby, tap [Voice] or speak any word loudly to activate VOX		
2. Speak a Voice Command from the table below:		
Current Mode	Desired Action	Say this:
Standby / FM / A2DP / AUX	"One+8" Intercom Call	<<Buddy Name>>
	Intercom call with A or B	"Call Intercom"
Standby	Start A2DP	"Music ON"
	Turn on FM	"Radio ON"
FM Radio	Turn off FM	"Radio OFF"
	Next Station Preset	"Next Station"
	Previous Station Preset	"Previous Station"
A2DP Music	Next track	"Next track"
	Previous track	"Previous track"
	Stop / Pause A2DP	"Music OFF"

6 PAIRING BLUETOOTH DEVICES: MOBILE PHONE/GPS/A2DP MUSIC PLAYER	
Bluetooth Channel 1 pairing mode	In Standby, press [Power] for 5 seconds
Bluetooth Channel 2 pairing mode	In Standby, press [+] for 5 seconds
To pair a GPS, when LEDs begin rapidly alternating, tap [+] .	

7 PHONE CALLS	
Answer a call	Tap [Power] or speak any word loudly to answer by VOX
Reject a call	Remain silent for 15 seconds, or press [Power] for 2 seconds
End a call	Tap [Power]
Voice Dial* (if supported by mobile phone)	Tap [Power] and follow the prompt from the mobile
Redial*	Double-tap [Power]
Hot Dial**	Double-tap [B] or tap [A] and [B] simultaneously
Set default mobile***	While on a phone call, press [+] for 5 seconds
Change default mobile	In Standby, press [+] and [-] for 5 seconds
INTERCOM CONFERENCE MODE	
Add/Remove Channel "A" to/from a call	Tap [A] while on a phone call
Add/Remove Channel "B" to/from a call	Tap [B] while on a phone call

*This feature is not available during intercom or mobile calls.
 ** Before using Hot-Dial, configure the number via the *Cardo Community*.
 *** If 2 mobile phones are paired directly to your scala rider G9, set one to use as default for outgoing calls.

8 A2DP MUSIC	
Play	In standby, press A for 2 seconds or use Voice Command
Pause/Stop	Press A for 2 seconds or use Voice Command
Next Track	With music ON, press + for 2 seconds or use Voice Command
Previous Track*	With music ON, press - for 2 seconds or use Voice Command
Music Scan	With music ON, press + (scans up) or - (scans down) for 5 sec. The first few seconds of each audio track will be played.
Stop Scan	To stop the scan on the current track, say any word loudly into the microphone or press + for 2 seconds
Music Sharing (via A2DP only)	
[SENDER] Start/Stop sharing your music	During A2DP music playback, press B for 2 seconds
[RECEIVER] Stop music sharing	Press B for 2 seconds

*With some phones you may need to repeat this action

9 FM RADIO	
Radio On	In standby, press B for 2 seconds or use Voice Command
Radio Off	Press B for 2 seconds or use Voice Command
Next Station	With radio ON, tap B or use Voice Command
Previous Station	Use Voice Command
RDS ON/OFF (Default: Off)	With Radio ON, press + and - simultaneously for 2 seconds

10 | INTERCOM


Note: G9 PowerSet™ units are already factory paired!

Pairing	
Pairing with a "One+8" Intercom Buddy	<ul style="list-style-type: none"> • Via the <i>Cardo Community</i> • <i>Flash-Pairing</i> • In Standby, press 📞 for 5 secs. Purple LED = success
Pairing Intercom Channel A	<ul style="list-style-type: none"> • <i>Flash-Pairing</i> (tap A) • In Standby, press A for 5 seconds – Rapid RED flashing
Pairing Intercom Channel B	<ul style="list-style-type: none"> • <i>Flash-Pairing</i> (tap B) • In Standby, press B for 5 seconds. – Rapid BLUE flashing
3-Way Intercom	<ul style="list-style-type: none"> • Rider 1 and Rider 2 pair via "A" • Rider 1 and Rider 3 pair via "B"
4-Way Intercom	<ul style="list-style-type: none"> • Rider 1 and Passenger 2 pair via "A" • Rider 3 and Passenger 4 pair via "A" • Passenger 2 and Passenger 4 pair via "B"


Calling "One+8" Intercom Buddies	
Voice Connect (VOX)	Manual Mode
a. Speak any word loudly into the microphone or tap 📞 . b. When you hear the Voice Command tone, say the name of the "One+8" Buddy	a. Press 📞 for 2 seconds b. Hear the names of all paired Buddies. c. Tap 📞 or speak any word loudly into the microphone when you hear the name. To cancel "One+8" Buddy List playback: Press 📞 for 2 seconds.

Calling Intercom Channels "A" and "B" (Two and Three-Way Calls)	
Voice Connect (VOX)	Manual Mode
Speak any word loudly into the microphone. When you hear the Voice Command tone, say "Call Intercom" to start an intercom call with "A" and/or "B" (subject to who is present) VOX Intercom call with only "A" or "B" will end automatically after 30 seconds of silence.	Use this to start an Intercom call with: <ul style="list-style-type: none"> • Channel "A": Tap A • Channel "B": Tap B To end a call tap A or B again. If you are already in an Intercom call with "A" or "B", you can add another rider ("A" or "B") by tapping the other channel button, or another rider can join the intercom call in the same way.

Three-Way Calls

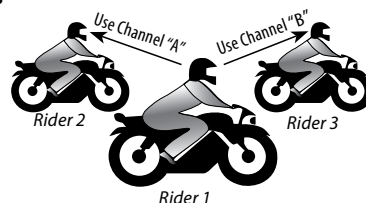

Four-Way Calls

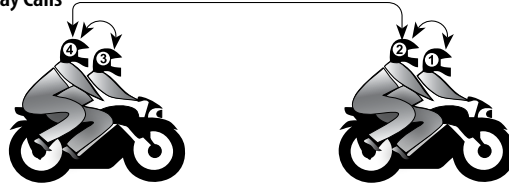

Calling	
1. Make sure all four units are in Standby.	
2. Passenger 2 should tap B to call Passenger 4. Wait until audio is heard on both units.	
3. Rider 1 should tap A to call Passenger 2.	
4. Rider 3 should tap A to call Passenger 4.	

11 CLICK TO LINK ("CTL") CALLS	
Start a CTL call request (search lasts up to 10 sec.)	Double-tap A
End a CTL call / Cancel a CTL call request	Tap A or 📞
Accept a CTL call	When hearing the CTL ringtone: Tap A or say any word loudly to answer by VOX
Reject a CTL call	While hearing the CTL ringtone: Remain silent until the ring tone stops or press A or B for 2 seconds
Enable / Disable CTL (Enabled by default)	Via the Settings Menu, the App or <i>Cardo Community</i>

12 TROUBLESHOOTING	
Reboot	If your scala rider stops responding, reset it by turning it off and then on again (press 🔌 for 2 seconds).
Reset Pairing (Deletes all paired devices)	1. In Standby, press 🔌 or + for 5 secs until LED flashes RED/BLUE. 2. Press + for 2 seconds until LED flashes 5 times in PURPLE.

The contents of this User Guide, including all text, illustrations and drawings are the exclusive intellectual property of Cardo Systems, Inc. (the "Company") and are protected by copyright laws. Any partial or total reproduction, translation and or dissemination, without the prior written authorization by the Company are strictly prohibited. Any rights not expressly granted herein are reserved.